

TeamMate brings people, information and technology together in a truly innovative way by integrating IT, AV communications and presentation systems within a single, powerful mobile or static unit.

Features

All in one fully mobile interactive display and collaborative resource.

Easily deployed from room to room.

Aesthetically designed to harmonise with all meeting and presentation environments.

Maximise functionality of SMART Board Interactive Display on stable, durable platform.

Share single resource across a number of locations with easy redeployment.

Stylish 19" 6U rack enclosure to accommodate all AV/IT peripherals.

Ease of connectivity with power rail and provision for input/output connections.

High duty lockdown castors for stability and steadiness in use.


TeamMate VariHite for SMART Board 6052i Interactive Display



SMART Board 6052i Interactive Display purchased separately

When used with the SMART Board 6052i Interactive Display, this aesthetically designed, high quality mobile stand provides a self contained presentation and learning resource.

- Mobile for greater ROI—shared resource
- Aesthetic, yet robust design
- VariHite electric lift and lower mechanism
- Self contained AV/IT rack enclosure
- Secure tamperproof integration
- Universal VESA 400 mm by 400 mm mounting kit

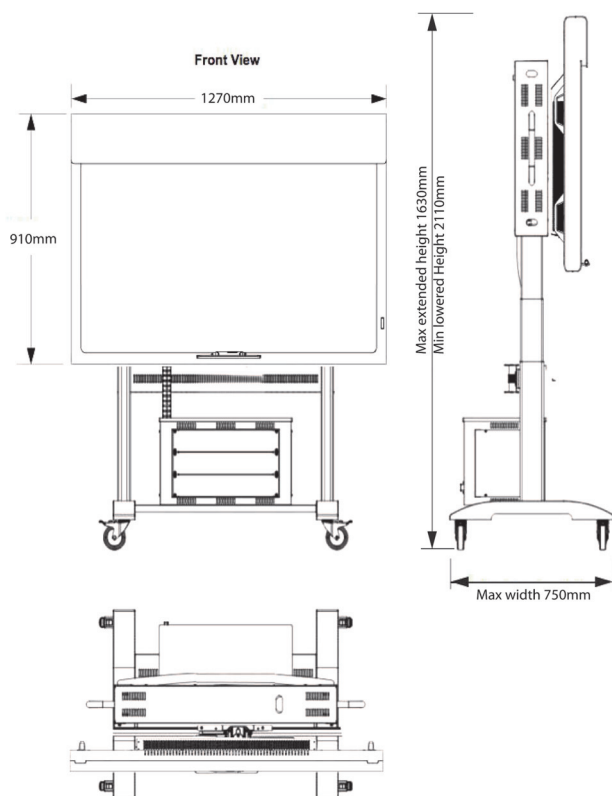

SMART Board 6052i Interactive Display purchased separately

Variable Height Mobile Stand

Standard 10 cm lockable trolley castors, supporting 19" by 6U (27 cm by 35 cm) rack unit.

Trolley Base

Smooth movement of unit with non-marking wheels and lockable castors.

Equipment Rack

Front and rear access with convection cooling for IT/AV equipment such as SMART Hub VE/SE. Power rail and provision for input/output connections. Side access allows cable routing via a cable chain in the variable height enclosure.

Adjustable Height

Paired actuators are fitted to the trolley base and electronically powered to provide lift and lower adjustment for SMART Board Interactive Display. Can be lowered to pass through 200 mm doorway.

Stability

Wide foot print and 10 cm wheel castors coupled to steel structure, provide excellent stability for full operation of the SMART Board Interactive Display with no resonance in use.

Mounting Kit

Universal VESA 400 mm by 400 mm mounting bracket, and lockable castors.

Power Bar

Country specific power bar.
NEMA (North America) 110AC.
IEC 240V, 50 Hz Europe and China.
BS EN 136 UK 3 pin connections.

SMART Products

SMART Board 6052i Interactive Display .
SMART Hub VE/SE.
Please refer to specifications from SMART Technologies for details of above.

Compliance

RoHS and WEEE.

Warranty

Five year limited equipment warranty on TeamMate stand.
Three year limited equipment warranty on height adjust mechanism.

Ordering information

ST30256 - TeamMate VariHite for 6052i (VariHite mobile stand & VESA 400 mm by 400 mm mounting kit).

Weight fully packed—108 Kg (excluding display)

Standalone weight—80 Kg (excluding display)

Packaged dimensions—1,350 by 930 by 1,540 mm

Manufactured in the UK by

Performance Enclosures Ltd
Wallingford, OX10 9DA
United Kingdom

www.teammate.co.uk

EXCLUSIVELY DISTRIBUTED BY

